





(3) UPA-2P's Tightpack

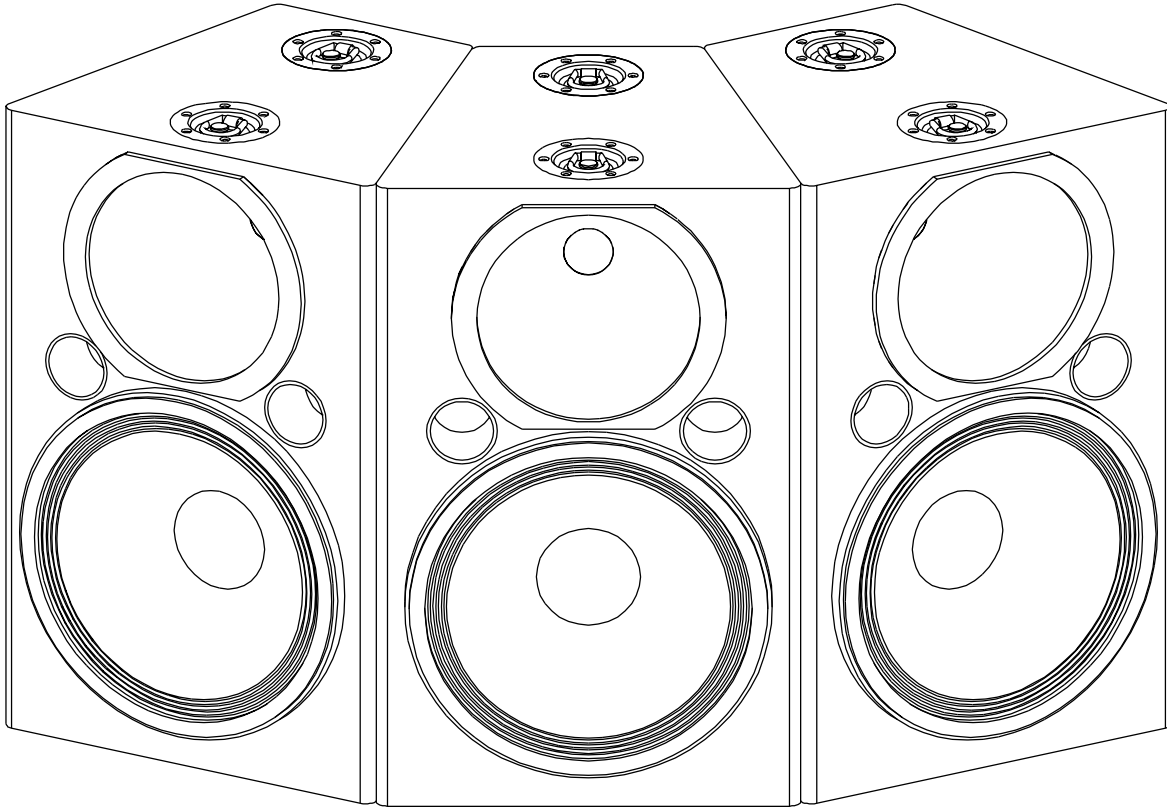

Array Coverage and SPL

Coverage:
 Vertical 45°
 Horizontal 90°

Maximum SPL at 1 Meter:
 Peak 139 dB

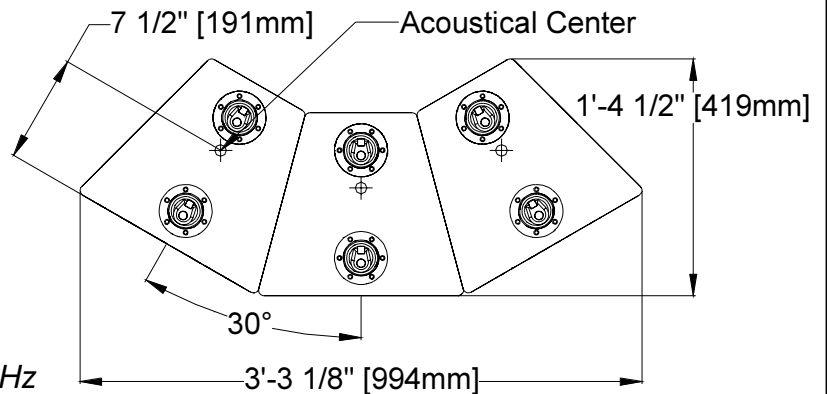

Base Specifications

Frequency Range (Free Field) 60 Hz to 18 kHz

Weight (Before Rigging) 231 lbs. (105 kg)

Measurement Notes:

Frequency range constitutes the usable bandwidth after on-axis normalization. Coverage angles measured as the -6 dB (1/4 power) points from the normalized on-axis frequency response averaged over the band from 125 to 8k Hz. All measurements made at 4 meters in an anechoic chamber using the Multi-purpose Acoustic Prediction Program (M.A.P.P.)® at 1/36 octave bands.

Date: 11.19.97 Doc #: 01.990.101.93 Rev.A



2832 San Pablo Ave
Berkeley, CA 94702
Phone: (510) 486-1166
Fax: (510) 486-8356
email: tech@msli.com